


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 28 TOWNSHIP 15 RANGE 3  
DATE: 9-9-05  
PARTY CHIEF: Wilcoxen  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 7-30-99

IN. S.P.C. E ZONE NAD '83  
NAME: 15032801  
N: 496680.7647(m)  
E: 52921.8802(m)

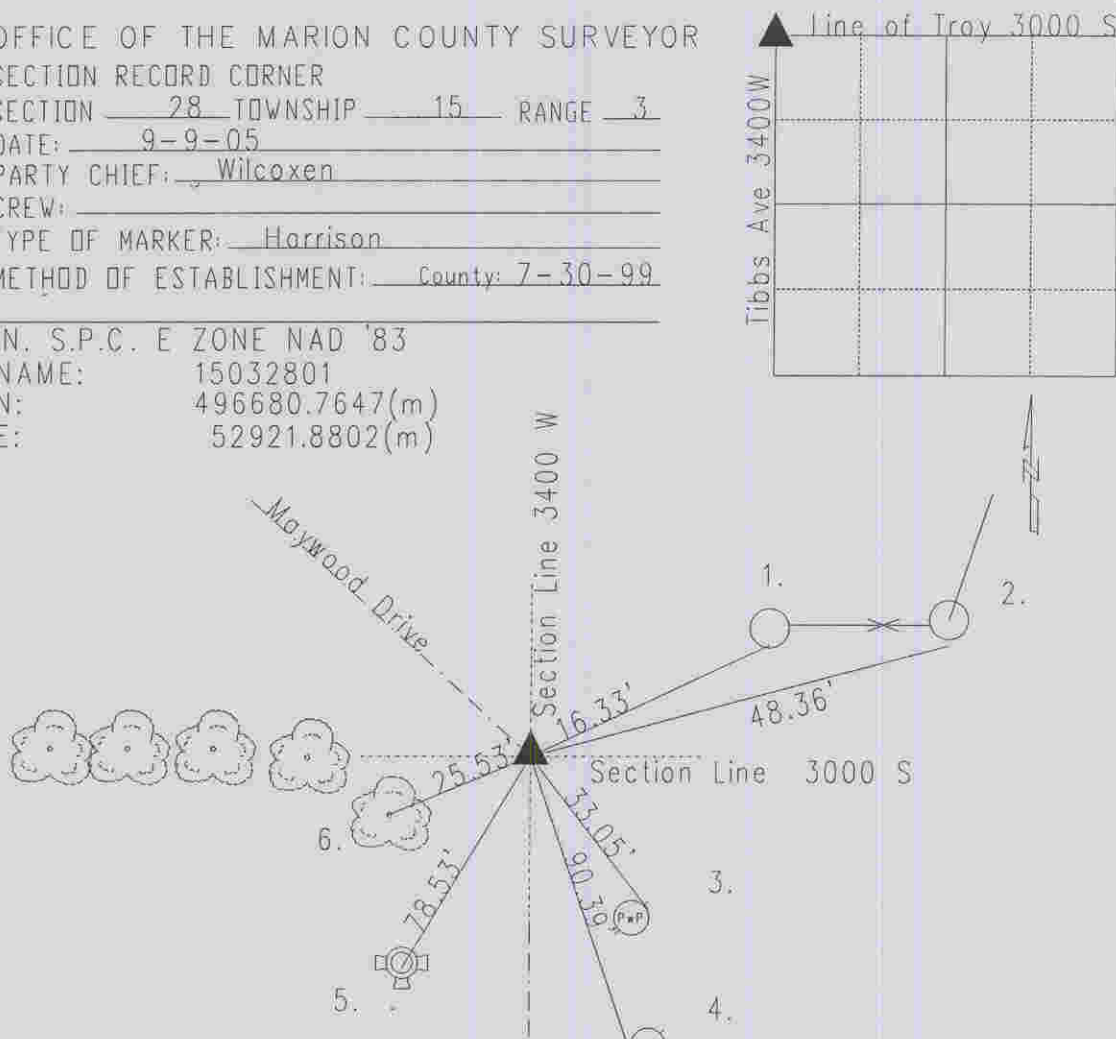

Original post set 1820 by Wm. B. Laughlin with witness: 30" white oak S 81 W 3 links; 10" sugar S 52 E 24 links per Marion County Atlas pg. 6. D.B. Hosbrook 9-30-1852 called no stone but witness: 16" hickory S 17 E 28 links, 20" oak N 6 1/2 W 100 links per Wayne Township Legal Survey Book pg. 52. MCSO 1940's called an iron pin over corner stone. Monroe 8-20-59 called an iron pin over stone. McLand 10-20-69 called a set railroad spike over stone 16" down. Miller 10-15-75 called a square head bolt 8" long over square cut stone 18" down. Greene 11-17-86 called a square head bolt over stone. Wilcoxen 6-1-90 called a square head bolt found. Kiste 7-15-96 called a sq. bolt fd. Wilcoxen 2-10-99 called a sq. bolt fd. Excavated 7-30-99 Kiste. Sq.bolt fd 4" dn. Two railroad spikes fd 18" dn. Stone fd 22" dn. Harrison set. Re-tied 2-5-00.

REF.	DISTANCE	DESCRIPTION
1.	16.33'	Center steel fence post
2.	48.36'	Center steel fence post (chain link fence)
3.	33.05'	PK nail E PwP no# 2"up
4.	90.39'	PK nail W PwP#25-630 12"up
5.	78.53'	Top nut of fire hydrant
6.	25.53'	Boat spike w/washer N spur root 36" hackberry